

RG11


75 Ohm Coaxial Cable

Catalog #2293K

Plenum: CMP(ETL)C(ETL)

CABLE CONSTRUCTION:

- CENTER CONDUCTOR:**
 14 AWG Solid Copper
 Nom. Dia: 0.0641"
- DIELECTRIC:**
 Foam FEP
 Dia. over Dielectric: 0.280" Nom.
- SHIELD:**
 Tape: Aluminum/Poly
 Braid: 34 AWG Tinned Copper
 95% Coverage
 Nom. Dia. 0.307"
- JACKET:**
 Kynar Flex
 Dia. over Jacket: 0.347" +/- 0.006"
 Nominal Jacket Thickness: 0.020"
 Minimum Spot: 0.016"

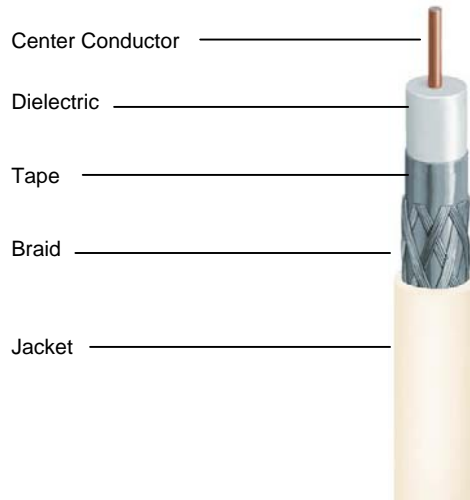

ELECTRICAL PROPERTIES:

- SPARKER TEST:** 5000 VAC
- DIELECTRIC STRENGTH:** Conductor to Shield: 4000 VDC
- CAPACITANCE:** 16.0 pF./FT. Nom.
- IMPEDANCE:** 75.0 +/- 3.0 Ohms
- VELOCITY OF PROPAGATION:** 84.0% Nom.
- DCR: Conductor:** 2.9 Ohms/1000 Ft. Nom.
- Shield:** 1.7 Ohms/1000 Ft. Nom.
- SRL:** 23dB (10 thru 1500 MHz) 100% Swept Tested

MECHANICAL PROPERTIES:

- MINIMUM BEND RADIUS:**
 Loaded: 20 Times Cable OD
 Unloaded: 10 Times Cable OD
- CABLE TEMP. RATING:**
 Temp: 125°C

ATTENUATION:

dB/100 FT. (NOM.)	@ FREQUENCY MHz
0.09 dB	1 MHz
0.45 dB	10 MHz
0.90 dB	50 MHz
1.28 dB	100 MHz
1.85 dB	200 MHz
2.75 dB	400 MHz
3.92 dB	700 MHz
4.72 dB	900 MHz
5.04 dB	1000 MHz
6.42 dB	1450 MHz
7.22 dB	1800 MHz
7.79 dB	2200 MHz
8.30 dB	2500 MHz
9.22 dB	3000 MHz

