


# RG-11 TYPE Direct Burial 75 Ohm Coaxial Cable Catalog #5917 NEC/CEC: None

## CABLE CONSTRUCTION:

- CENTER CONDUCTOR:**  
 14 AWG Copper/Steel  
 Nom. Dia: 0.0641"
- DIELECTRIC:**  
 Foam Polyethylene  
 Diameter over Dielectric: 0.280" Nom.
- SHIELD:**  
 Foil: Bonded Aluminum Tape  
 Braid: 34 AWG Aluminum  
 60% Coverage  
 Nom. Diameter 0.312"
- JACKET:**  
 PE  
 Diameter over Jacket: 0.395" +/- 0.006"  
 Nominal Jacket Thickness: 0.040"  
 Minimum Spot: 0.032"

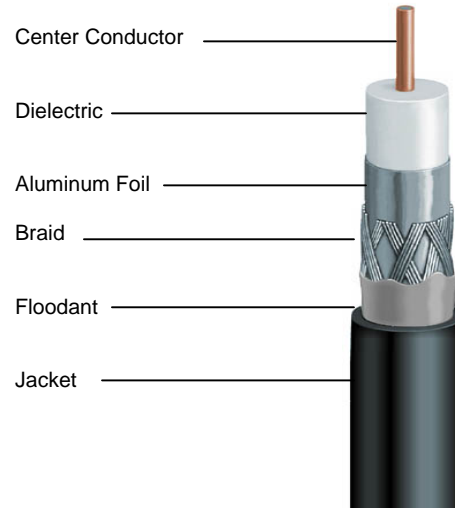

## ELECTRICAL PROPERTIES:

- SPARKER TEST:** 4000 VAC
- DIELECTRIC STRENGTH:** Conductor to Shield: 4000 VDC
- CAPACITANCE:** 16.2 pF./Ft. Nom.
- IMPEDANCE:** 75.0 +/- 3.0 Ohms
- VELOCITY OF PROPAGATION:** 82.0% Nom.
- DCR:** Conductor: 11.0 Ohms/1000 Ft. Nom.  
 Shield: 6.9 Ohms/1000 Ft.
- SRL:** 20dB (5 thru 1000 MHz) 100% Swept Tested  
 18dB (1000 thru 2200 MHz) 100% Swept Tested  
 15dB (2200 - 3000 MHz) 100% Swept Tested

## MECHANICAL PROPERTIES:

- MINIMUM BEND RADIUS:**  
 Loaded: 20 Times Cable OD  
 Unloaded: 10 Times Cable OD

## ATTENUATION:

dB/100 FT. (NOM.)	@ FREQUENCY MHz
0.17 dB	1 MHz
0.45 dB	10 MHz
0.89 dB	50 MHz
1.21 dB	100 MHz
1.68 dB	200 MHz
2.37 dB	400 MHz
3.27 dB	700 MHz
3.77 dB	900 MHz
3.95 dB	1000 MHz
4.46 dB	1200 MHz
5.08 dB	1450 MHz
5.58 dB	1800 MHz
6.29 dB	2200 MHz
6.79 dB	2500 MHz
7.58 dB	3000 MHz